


### Material quality

- Standard, steel S235 JR, rust preventive primer coated
- Stainless steel, material grade 1.4571/ A4 (DIN 17456 or AISI 316Ti)

### Dimensions of CFS-T SS transit frames (single-row)

CFS-T SS	2 x 1	2 x 2	2 x 3	2 x 4	2 x 5	2 x 6	2 x 7	2 x 8	2 x 9	2 x 10
H1xB1 in mm	101x120	101x250	101x380	101x510	101x640	101x770	101x900	101x1030	101x1160	101x1290
H2xB2 in mm	121x140	121x270	121x400	121x530	121x660	121x790	121x920	121x1050	121x1180	121x1310
CFS-T SS	4 x 1	4 x 2	4 x 3	4 x 4	4 x 5	4 x 6	4 x 7	4 x 8	4 x 9	4 x 10
H1xB1 in mm	160x120	160x250	160x380	160x510	160x640	160x770	160x900	160x1030	160x1160	160x1290
H2xB2 in mm	180x140	180x270	180x400	180x530	180x660	180x790	180x920	180x1050	180x1180	180x1310
CFS-T SS	6 x 1	6 x 2	6 x 3	6 x 4	6 x 5	6 x 6	6 x 7	6 x 8	6 x 9	6 x 10
H1xB1 in mm	218x120	218x250	218x380	218x510	218x640	218x770	218x900	218x1030	218x1160	218x1290
H2xB2 in mm	238x140	238x270	238x400	238x530	238x660	238x790	238x920	238x1050	238x1180	238x1310
CFS-T SS	8 x 1	8 x 2	8 x 3	8 x 4	8 x 5	8 x 6	8 x 7	8 x 8	8 x 9	8 x 10
H1xB1 in mm	277x120	277x250	277x380	277x510	277x640	277x770	277x900	277x1030	277x1160	277x1290
H2xB2 in mm	297x140	297x270	297x400	297x530	297x660	297x790	297x920	297x1050	297x1180	297x1310

Tolerances: CFS-T SS frames are manufactured with a tolerance of -0.0/+0.4 mm for each frame window. Accordingly, with multiple frame combinations, total tolerance may be up to 4 mm (dimensions B1/B2).

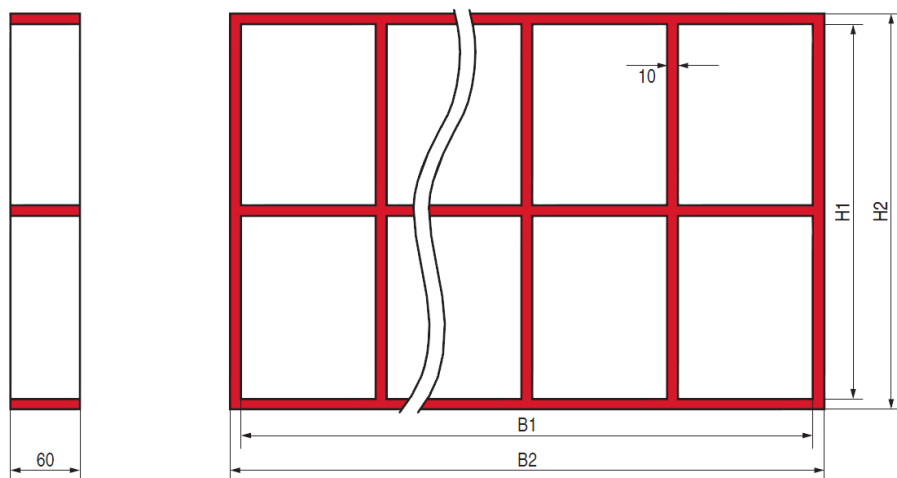

CFS-T SS multiple frames (double-row)

### Dimensions of CFS-T SS transit frames (double-row)

CFS-T SS	4+4x1	4+4x2	4+4x3	4+4x4	4+4x5	4+4x6	4+4x7	4+4x8	4+4x9	4+4x10
H1xB1 in mm	330x120	330x250	330x380	330x510	330x640	330x770	330x900	330x1030	330x1160	330x1290
H2xB2 in mm	350x140	350x270	350x400	350x530	350x660	350x790	350x920	350x1050	350x1180	350x1310
CFS-T SS	6+6x1	6+6x2	6+6x3	6+6x4	6+6x5	6+6x6	6+6x7	6+6x8	6+6x9	6+6x10
H1xB1 in mm	446x120	446x250	446x380	446x510	446x640	446x770	446x900	446x1030	446x1160	446x1290
H2xB2 in mm	466x140	466x270	466x400	466x530	466x660	466x790	466x920	466x1050	466x1180	466x1310
CFS-T SS	8+8x1	8+8x2	8+8x3	8+8x4	8+8x5	8+8x6	8+8x7	8+8x8	8+8x9	8+8x10
H1xB1 in mm	564x120	564x250	564x380	564x510	564x640	564x770	564x900	564x1030	564x1160	564x1290
H2xB2 in mm	584x140	584x270	584x400	584x530	584x660	584x790	584x920	584x1050	584x1180	584x1310

Tolerances: CFS-T SS frames are manufactured with a tolerance of  $-0.0/+0.4$  mm for each frame window. Accordingly, with multiple frame combinations, total tolerance may be up to 4 mm (dimensions B1/B2).